



Website :
www.4t^{fi}.com.au






Email :
info@4t^{fi}.com.au

4t01E6RBTM2S28EW

6MP Red and blue flashing light, Alarm, Turret IP camera



Dimensions

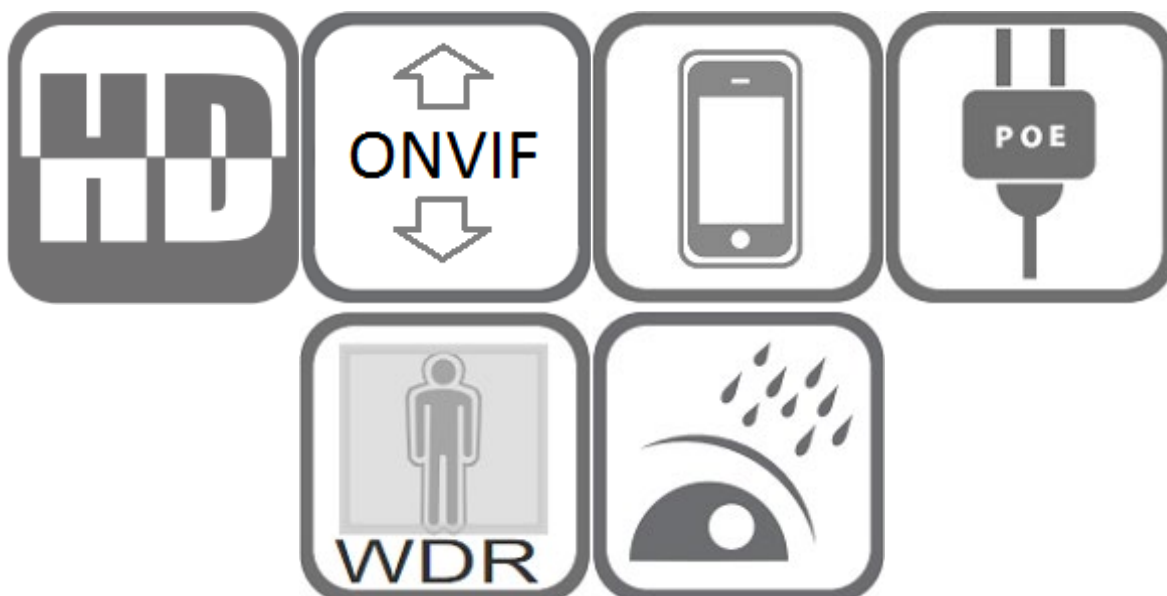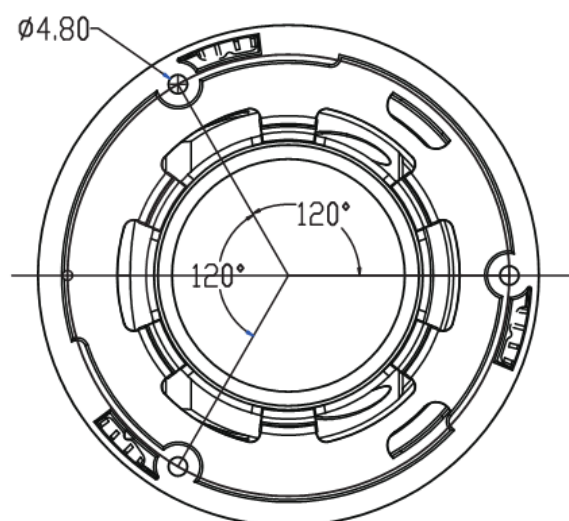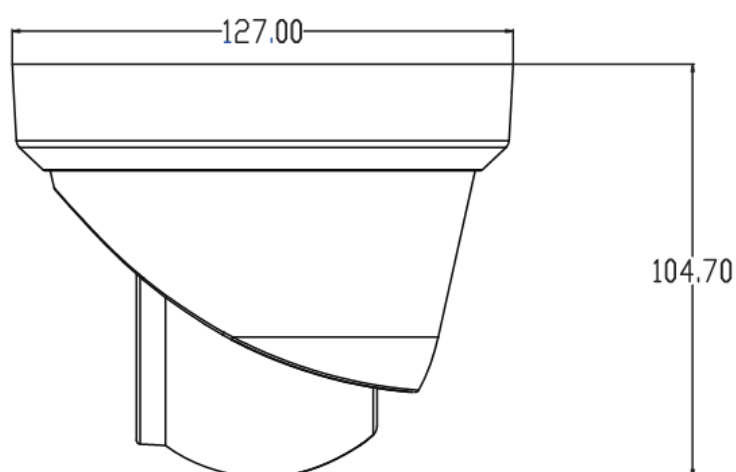



Features

- 1/2.8" Sony CMOS sensor
- FHD resolution 3072x 2048P
- Low illumination 0.01Lux
- Day/Night, AWB/MWB,BLC, HLC, 2D/3D-DNR
- D-WDR, Mirror, rotate, Defogging
- Multiple Style OSD Overlay, Motion Detection, Privacy Mask
- RTSP and ONVIF 17.06 compatible with many third-party NVR's
- H.264/H.265 dual-stream media server
- Easy-to-use P2P Cloud service
- Supports user authentication, video data encryption
- Supports Alarm Snapshot to Email and FTP
- Multiple WEB browsers - IE, Firefox 32bit ESR, Edge, Google Chrome, PC Client, Mobile APP remote access
- Two way audio, Built in Microphone and Speaker
- SD card slot (supports up to 512GB micro SD card), with reset button
- RJ45 100mbps network port, IEEE802.3af, PoE
- Lightning protection 4000V
- Strong waterproof housing, IP67
- 1PC red and blue alarm LED + 1PC Soft & Warm Supplemental Light LED, Light distance:20-30M
- HD 2.8mm F1.0 true star light lens



Technical Specifications:

Model	4t01E6RBTM2S28EW
Camera	
Image Sensor	1/2.8" Sony CMOS
Effective Pixels	6 megapixels (3072*2048)
Electronic Shutter	AUTO, 1/25s ~ 1/1000000s
Min. Illumination	0.01Lux @ F1.0 (AGC ON)
Day/Night	Auto/Color/(B/W)/Timing
WDR	Digital WDR
White Balance	Auto/Manual
BLC /HLC	Support
DNR	2D/3D DNR
Other	Human body and Vehicle detection, AGC, Motion Detection, Privacy Mask, Flip, Rotate, ROI, OSD overlay
Encode	
Video Standard	H.264/H.265
Video Resolution	Main Stream: 25fps@6MP (3072x2048)/ 5MP (2592x1944)/4MP/3MP/1080P/720P, etc. Sub stream: 720x480/VGA(640x480)/360P/QVGA@25fps,etc.
Video Bitrates	512Kbps - 8Mbps, VBR/CBR
Audio Standard	G.711-u/G.711-a/AAC
Audio	Two way audio, Built in Microphone and Speaker
OSD Overlay	Title and Time overlay, custom color adjustable
LED's and light distance	
LED	1PC red and blue flashing (alarm) LED + 1PC Soft & Warm Supplemental LED
Light Distance	20-30 M

Lens	
Focal length	HD 2.8mm F1.0 true star light lens
Other Function	
with SD card slot (supports up to 512GB micro SD card), with reset button	
Network Services	
Protocol	HTTP/RTSP/FTP/SMTP/DHCP/NTP, etc.
P2P	Yes
Web	IE , Firefox, Edge, Google Chrome etc.
Media	CMS, Android, IOS
ONVIF	17.06 compatible
General	
Network Port	1-RJ45, 100Mbps, POE
Power Supply	12 VDC \pm 10%,POE
Power Consumption	< 8 W
Operating Temp.	-30°C-(+60)°C, 10%-90%RH