



Website :
www.4tifi.com.au





Email :
info@4tifi.com.au

4t01E6DLTM2S28EW

6MP Dual light, Turret IP camera with two way audio and SD card slot



Dimensions

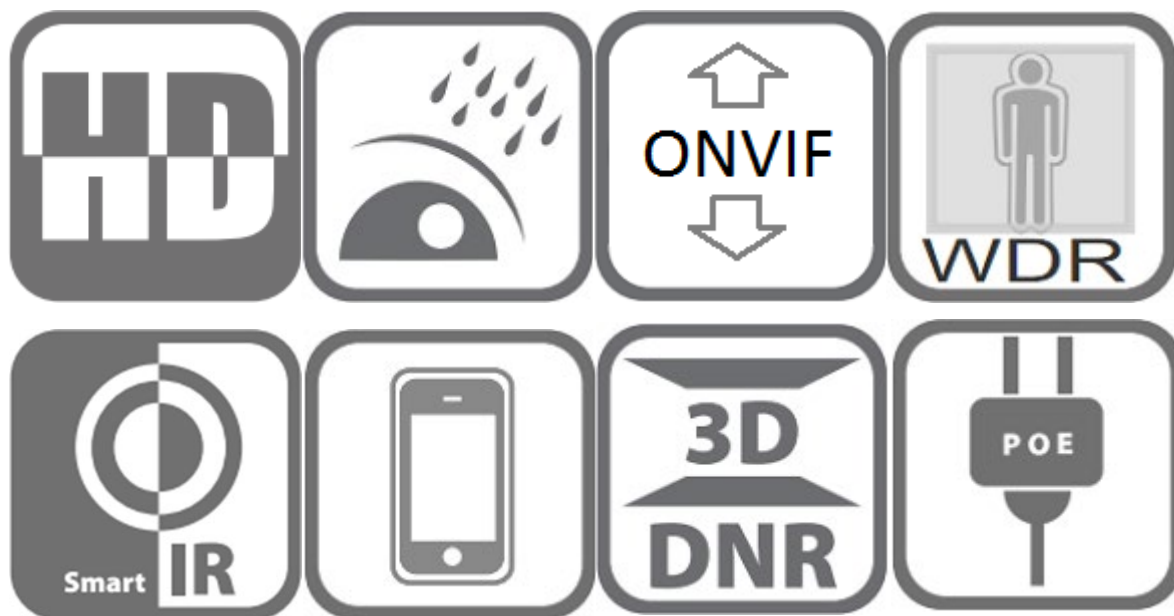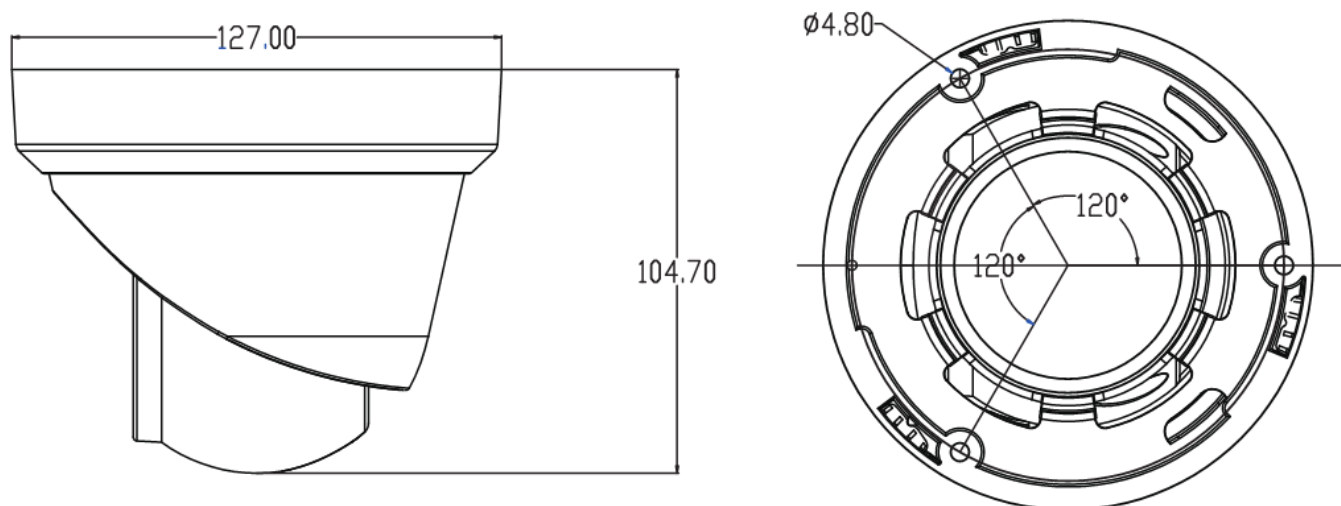



Features:

- 1/2.8" Sony CMOS sensor
- 6MP resolution 3072 x 2048P
- Low illumination 0.01Lux
- Day/Night (ICR), AWB, AGC, BLC, 2D/3D-DNR, IR-CUT
- Digital WDR, Motion Detection, Privacy Mask, Mirror
- RTSP and ONVIF 17.06 compatible
- H.265/H.264 dual stream media server
- Easy to use P2P Cloud service
- Multi web browser, PC client, mobile APP remote access
- Two way audio, built in microphone and speaker ,with SD card slot (supports up to 512GB SD card)
- Supports audio alarm to warn intruders off
- Supports warm light on when detecting human and vehicle
- Lightning protection 4000V
- Strong waterproof housing, IP67
- 2PCS dual lights, IR distance: 25-30M, warm light distance: 25-30M, Three light modes:
 - Mode 1: Smart Dual Light
 - Mode 2: Pure Infrared Light
 - Mode 3: Pure White Light
- HD 2.8mm F1.6 lens
- With reset button



Technical Specifications:

Model	4t01E6DLTM2S28EW
Camera	
Image Sensor	1/2.8" SONY IMX335 CMOS
Effective Pixels	3072 (H) × 2048 (V)
Electronic Shutter	AUTO, 1/25s ~ 1/100000s
Min. Illumination	0.01Lux @ F1.6 (AGC ON), 0Lux IR on
Day/Night	Auto/Color/(B/W)/Timing
WDR	Digital WDR
White Balance	Auto/Indoor/Outdoor
BLC	Supported
DNR	2D/3D DNR
Other	Human and vehicle detection ,motion detection, privacy mask, mirror, flip
Encode	
Embedded Solution	SSC377D
Video Standard	H.264/H.265
Video Resolution	Main Stream: 25fps @6 MP (3072x2048) / 5MP (2592x1944) /4MP/3MP/1080P/720P,etc. Sub stream: 720x480/VGA(640x480)/360P/QVGA@30fps,etc.
Video Bitrates	512Kbps - 10Mbps, VBR/CBR
Audio Standard	G.711-u/G.711-a/AAC

OSD Overlay	Title and Time overlay
LED's	
LED's	2PCS dual lights
IR distance	25-30M
Warm Light Distance	25-30 M
Lens	
Focal length	HD 2.8mm F1.6 lens
Functions	
Two way audio, built in microphone and speaker, with SD card slot (supports up to 512GB SD card)	
Network Services	
Protocol	HTTP/RTSP/FTP/NFS/SMTP/DHCP/NTP, etc.
P2P	Yes
Web	IE , Firefox, Edge, Google Chrome etc.
Media	CMS, Android, IOS
ONVIF	17.06 compatible
General	
Network Port	1-RJ45, 100Mbps
Power Supply	POE ,12 VDC $\pm$ 10% (Not included)
Power Consumption	< 8 W
Operating Temp.	-30°C-(+60)°C, 10%-90%RH