



Website :
www.4t^{fi}.com.au






Email :
info@4t^{fi}.com.au

4t01G8DLTM2S28EW

8MP HD Dual Light Turret POE IP camera



Dimensions

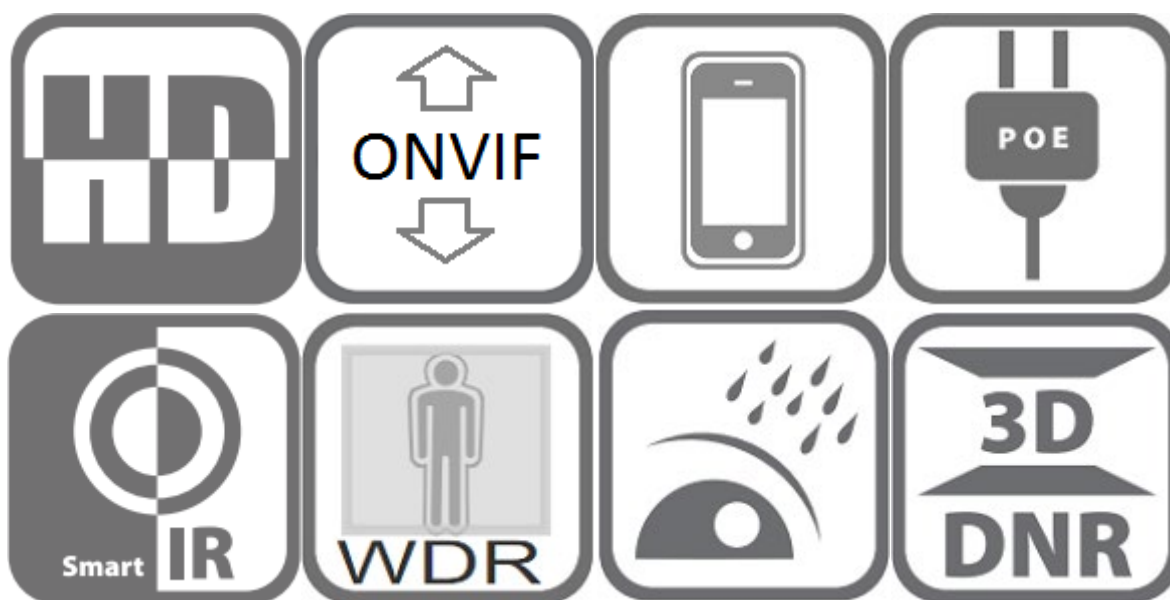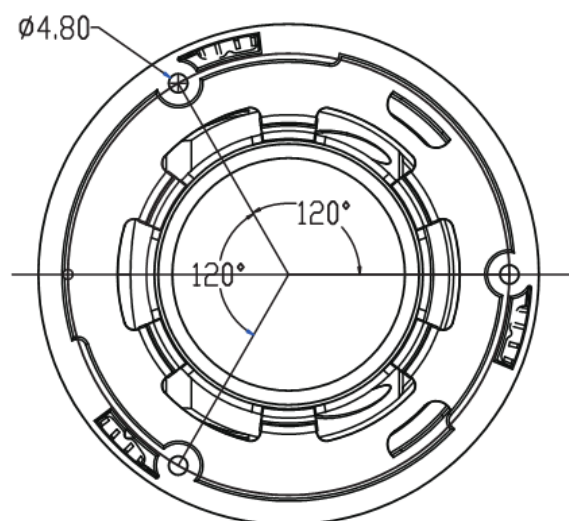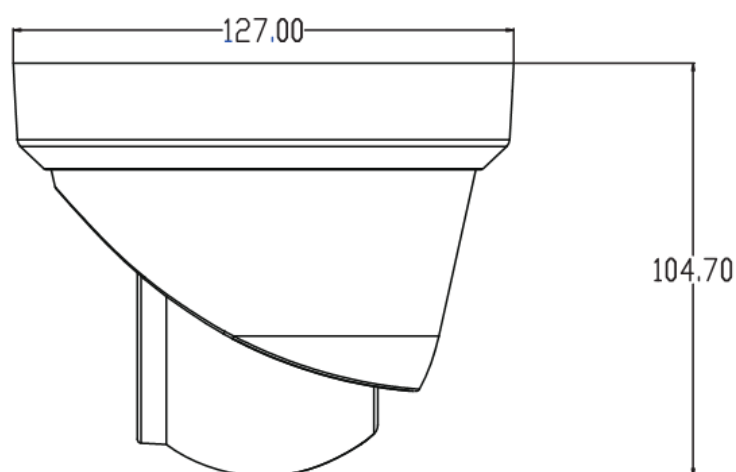



Features:

- 1/2.8" Sony CMOS sensor
- FHD resolution 3840x 2160P
- Low illumination 0.01Lux
- Day/Night, AWB/MWB, BLC, HLC, 2D/3D-DNR, Shutter, IR-CUT
- D-WDR, Mirror, rotate, Defogging
- Multiple Style OSD Overlay, Motion Detection, Privacy Mask
- RTSP and ONVIF 17.06 compatible with many third-party NVR's
- H.264/H.265 dual-stream media server
- Easy-to-use P2P Cloud service
- Supports user authentication, video data encryption
- Supports Alarm Snapshot to Email and FTP
- Multiple WEB browsers - IE, Firefox 32bit ESR, Edge, Google Chrome, PC Client, Mobile APP remote access
- Two-way audio, Built in Microphone and Speaker
- SD card slot (supports up to 512GB micro SD card), with reset button
- RJ45 100mbps network port, IEEE802.3af, PoE
- Lightning protection 4000V
- Strong waterproof housing, IP67
- 2PCS dual Lights. IR distance: 25-30M, White light distance: 25-30M, Three light Modes:
 - Mode 1: Smart Dual Light
 - Mode 2: Pure Infrared Light
 - Mode 3: Pure White Light
- HD 2.8mm fixed lens



Technical Specifications:

Model	4t01G8DLTM2S28EW
Camera	
Image Sensor	1/2.8" Sony CMOS
Effective Pixels	8 megapixels (3840*2160)
Electronic Shutter	AUTO, 1/25s ~ 1/100000s
Min. Illumination	0.01Lux @ F1.6 (AGC ON), 0Lux IR on
Day/Night	Auto/Color/(B/W)/Timing
WDR	Digital WDR
White Balance	Auto/Manual
BLC /HLC	Support
DNR	2D/3D DNR
Other	Human body and Vehicle detection, AGC, Motion Detection, Privacy Mask, Flip ,Rotate, ROI, OSD overlay
Encode	
Video Standard	H.264/H.265
Video Resolution	Main Stream: 20fps@8MP (3840x2160), 30fps@6MP (3072x2048), 5MP (2592*1944)/4MP/3MP/1080P/720P,etc. Sub stream: 720x480/VGA(640x480)/360P/QVGA@30fps,etc.
Video Bitrates	512Kbps - 12Mbps, VBR/CBR
Audio Standard	G.711-u/G.711-a/AAC
Audio	Two way audio, Built in Microphone and Speaker
OSD Overlay	Title and Time overlay ,custom color adjustable
LED and light distance	
LED	2PCs dual Lights
IR Distance	20-30 M
White light Distance	20-30 M

Lens	
Focal length	HD 2.8mm fixed lens
Other Function	
SD card slot (supports up to 512GB micro SD card), with reset button	
Network Services	
Protocol	HTTP/RTSP/FTP/SMTP/DHCP/NTP/NFS, etc.
P2P	Yes
Web	IE , Firefox, Edge, Google Chrome etc.
Media	CMS, Android, IOS
ONVIF	17.06 compatible
General	
Network Port	1-RJ45, 100Mbps, POE
Power Supply	12 VDC \pm 10%, POE
Power Consumption	< 8 W
Operating Temp.	-30°C-(+60)°C, 10%-90%RH