



Website :
www.4tfi.com.au






Email :
info@4tfi.com.au

4T01L8DLTP2SBXEW

8MP HD Dual Light Turret PTZ POE IP Camera



Dimensions

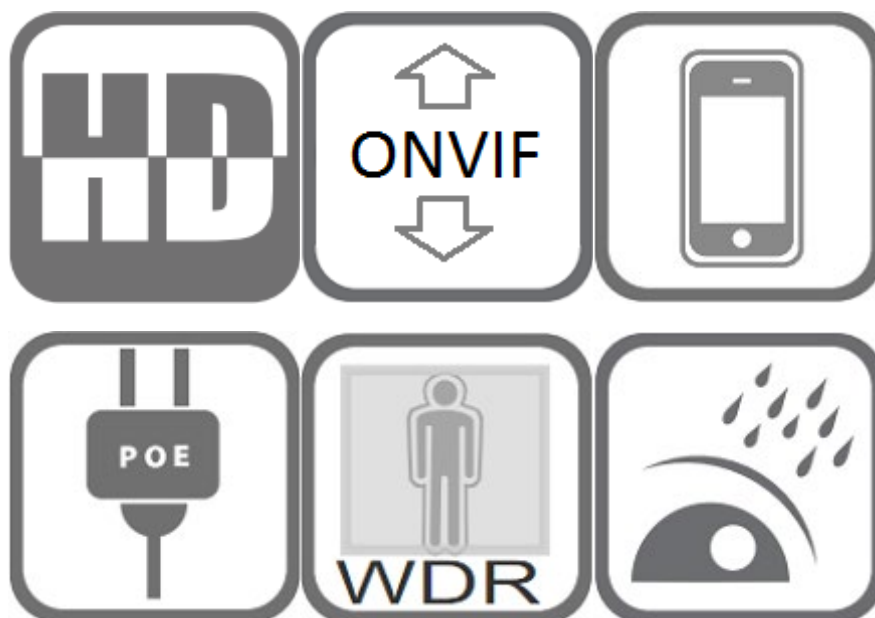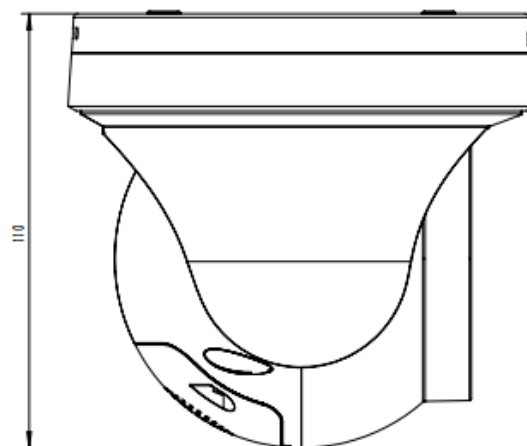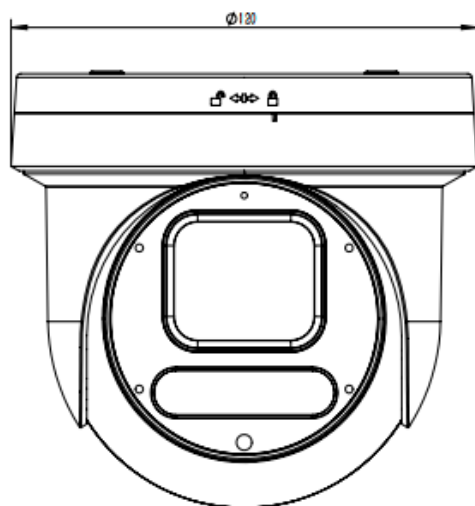



Features

- 1/2.8" Sony CMOS sensor
- 4K resolution 3840 x 2160P
- Low illumination 0.01Lux
- Day/Night, AWB/MWB, BLC, HLC, 2D/3D-DNR, Shutter, IR-CUT
- D-WDR, Flip, Defogging
- Multiple Style OSD Overlay, Motion Detection, Privacy Mask
- RTSP and ONVIF 17.06 compatible with many third-party NVR's
- H.264/H.265 dual-stream media server
- Easy-to-use P2P Cloud service
- Supports user authentication, video data encryption
- Supports Alarm Snapshot to Email and FTP
- Multiple WEB browsers - IE, Firefox 32bit ESR, Edge, Google Chrome, PC Client, Mobile APP remote access
- RJ45 100mbps network port, IEEE802.3af, 48v PoE
- Lightning protection 4000V
- Strong metal waterproof housing, IP66
- Smart Human body and Vehicle detection
- Built-in Mic and speaker, two-way audio
- Siren and voice alarm, flashlight alarm
- SD card slot (supports up to 512GB micro SD card), with reset button
- 2pcs IR Array LED's + 2pcs soft and warm lighting LED's, IR distance 40 meters, warm-light distance 30 meters, Three light Modes:
 - Mode 1: Smart Dual Light
 - Mode 2: Pure Infrared Light
 - Mode 3: Pure White Light
- 2.7-13.5mm 5x optical zoom and AF lens



Technical Specifications

Model	4T01L8DLTP2SBXEW
Camera	
Image Sensor	1/2.8" Sony CMOS
Effective Pixels	8 megapixels
Electronic Shutter	AUTO, 1/10s ~ 1/1000000s
Min. Illumination	0.01Lux @ F1.6 (AGC ON), 0Lux IR on
Day/Night	Auto/Color/(B/W)/Timing
WDR	Digital WDR
White Balance	Auto/Manual
BLC /HLC	Support
DNR	2D/3D DNR
Other	Image adjust , Flip
Encode	
Video Standard	H.265+/H.265/H.264/MJPEG
Video Resolution	Main Stream: 20fps@8MP (3840x2160), 30fps@6MP (3072x2048)/5MP (2592x1944)/4MP/3MP/1080P/720P, etc. Sub stream: 720x480/VGA (640x480)/360P/QVGA@30fps, etc. Third stream:1080P/720P/CIF @10fps
Video Bitrates	512Kbps - 12Mbps, VBR/CBR
Audio Standard	G.711-u/G.711-a/AAC
Audio	Two-way audio, Built in Microphone and Speaker
Smart Detection	Smart Human body and Vehicle Detection
Micro-SD Slot	SD card slot (supports up to 512GB micro SD card)
Reset Button	Yes
LED and light distance	
LED	2pcs IR Array LED's + 2pcs soft and warm lighting LED's
IR Distance	30-40 M
White light distance	20-30 M

Lens	
Focal length	2.7-13.5 mm motorised zoom and AF lens
Zoom	5x optical zoom
PTZ	
Pan/Tilt Range	Pan: 0° ~ 280°; Tilt: 0° ~ 90°
Preset Point	10
Control Speed	Pan: 15° /s; Tilt: 15° /s
Guard Position	Support
Power-off Recovery	Support
Network Services	
Protocol	HTTP/RTSP/FTP/SMTP/DHCP/NTP/NFS/RTMP, etc.
P2P	Yes
Web	IE , Firefox, Edge, Google Chrome etc.
Media	CMS, Android, IOS
ONVIF	17.06 compatible
General	
Network Port	1-RJ45, 100Mbps, PoE 48V in
Power Supply	12 VDC ± 10% 2A
Power Consumption	< 15 W
Operating Temp.	-30°C-(+60)°C, 10%-90%RH