


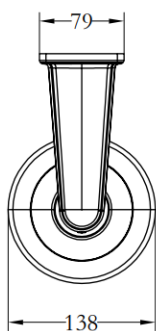
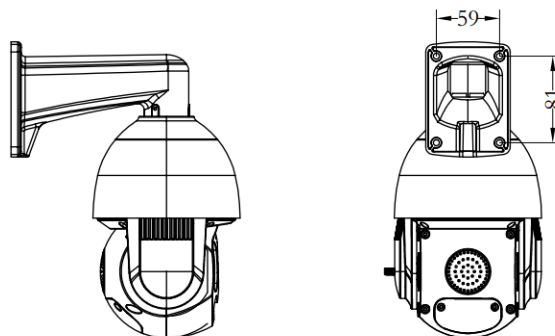


4t01K6DLDP2SDXFW

6MP Auto Tracking Dual Light POE PTZ IP Camera

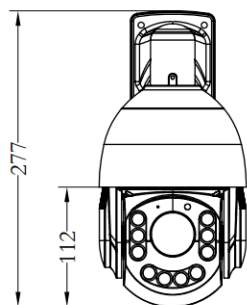

Dimensions

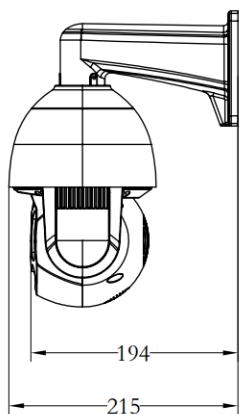



Features

- 1/2.8" Sony CMOS sensor
- 6MP resolution 3072 x 2048P
- Low illumination 0.01Lux
- Day/Night, AWB/MWB, BLC, HLC, 2D/3D-DNR, Shutter, IR-CUT
- D-WDR, Flip, Defogging
- Multiple Style OSD Overlay, Motion Detection, Privacy Mask
- RTSP and ONVIF 17.06 compatible with many third-party NVR's
- H.264/H.265 dual-stream media server
- Easy-to-use P2P Cloud service
- Supports user authentication, video data encryption
- Supports Alarm Snapshot to Email and FTP
- Multiple WEB browsers - IE, Firefox 32bit ESR, Edge, Google Chrome, PC Client, Mobile APP remote access
- RJ45 100mbps network port, IEEE802.3af, 48v PoE
- Lightning protection 4000V
- Strong metal waterproof housing, IP66
- Smart Human and Vehicle Detection, Smart Human Auto Tracking
- Built-in Mic and speaker, two-way audio
- SD card slot (supports up to 512GB micro SD card)
- 6 pcs Array IR LED's + 4pcs soft and warm lighting LEDs, IR distance 70-80 meters, soft and warm lighting distance: 50-60meters, Three light Modes:
 - Mode 1: Smart Dual Light
 - Mode 2: Pure Infrared Light
 - Mode 3: Pure White Light
- 4.7-94mm 20X optical zoom and AF lens



Technical Specifications:

Model	4t01K6DLDP2SDXFW
Camera	
Image Sensor	1/2.8" Sony CMOS
Effective Pixels	6MP@3072*2048
Electronic Shutter	AUTO, 1/10s ~ 1/100000s
Min. Illumination	0.01Lux @ F1.6 (AGC ON), 0Lux IR on
Day/Night	Auto/Color/(B/W)/Timing
WDR	Digital WDR
White Balance	Auto/Manual
BLC /HLC	Support
DNR	2D/3D DNR
Other	Image adjust, Flip
Encode	
Video Standard	H.265+/H.265/H.264
Video Resolution	Main Stream: 25fps@6MP (3072x2048)/5MP (2592x1944), 30fps@4MP/3MP/1080P/720P Sub stream: 30fps@D1/VGA/360P/CIF, etc.
Video Bitrates	512Kbps - 8Mbps, VBR/CBR
Audio Standard	G.711-u/G.711-a/AAC
Audio	Two-way audio, Built in Microphone and Speaker
Smart Detection	Smart Human body and Vehicle Detection, supports human auto tracking
Micro-SD Slot	SD card slot (supports up to 512GB micro SD card)
IR Led	
LED's	6 pcs Array IR LED's + 4pcs soft and warm lighting LED's
Light Distance	IR distance 70-80 meters, soft and warm lighting distance:50-60meters
Lens	
Focal length	4.7-94mm
IRIS	F1.6-3.5
View angle	64 - 2.9 °
Zoom	20x optical zoom

PTZ	
Pan/Tilt Range	Pan: 0° ~ 360°; Tilt: -5° ~ 90°
Preset Points	256
Control Speed	Pan: 0.5° ~25° /s; Tilt: 0.5° ~25° /s
A-B Scanning	Support
Auto Cruising	Supports 8 groups patrol, Max. 16 presets per group
Power on Action	Preset/Scan/Cruise
Power-off Recovery	Support
Cruise tracking	Cruise presets can work together with human auto tracking
Network Services	
Protocol	HTTP/RTSP/FTP/SMTP/DHCP/NTP/RTMP, etc.
P2P	Yes
Web	IE , Firefox ,Edge, Google Chrome etc.
Media	CMS, Android, IOS
ONVIF	17.06 compatible
General	
Network Port	1-RJ45, 100Mbps, PoE 48V
Power Supply	12 VDC ± 10% 2A
Power Consumption	< 22 W
Operating Temp.	-30°C-(+60)°C, 10%-90%RH

Ceiling Mount (Optional)

