



Website :
www.4tifi.com.au









Email :
info@4tifi.com.au

4t01L8DLDP2SDXFW

4K Auto tracking, Human and Vehicle detection, Dual Light, IP PTZ camera



Dimensions

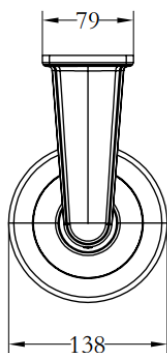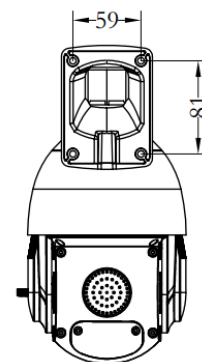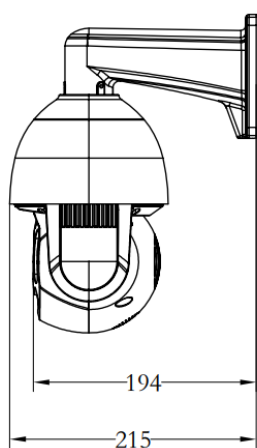



Features:

- 1/2.8" Sony CMOS sensor
- 4K resolution 3840 x 2160P
- Low illumination 0.01Lux
- 20x optical zoom
- Smart Human and Vehicle Detection
- Smart Human auto Tracking
- Built-in Microphone and speaker, two-way audio
- SD card slot, supports up to 256GB Micro SD card
- Day/Night, AWB/MWB, BLC, HLC, 2D/3D-DNR, Shutter, IR-CUT
- Digital WDR, Flip, Defogging
- Multiple Style OSD Overlay, Motion Detection, Privacy Mask
- RTSP and ONVIF 17.06. Compatible with many third party NVR's
- H.264/H.265 dual-stream
- Supports user authentication, video data encryption
- Supports alarm snapshot to Email and FTP
- Multiple WEB browsers IE, Firefox, Chrome, Edge, Safari
- RJ45 100mbps network port, IEEE802.3af 48v PoE
- Lightning protection 4000V
- Strong metal water-proof housing, IP66
- 6 pcs Array IR LED's + 4pcs soft and warm lighting LEDs, IR distance 70-80 meters, soft and warm lighting distance: 50-60meters, Three light Modes:
 - Mode 1: Smart Dual Light
 - Mode 2: Pure Infrared Light
 - Mode 3: Pure White Light
- IR distance 70-80 meters, soft and warm lighting distance: 50-60meters

Technical Specifications

Model	4t01L8DLDP2SDXFW
Camera	
Image Sensor	1/2.8" Sony CMOS
Effective Pixels	8MP@3840*2160
Electronic Shutter	AUTO, 1/10s ~ 1/1000000s
Min. Illumination	0.01Lux @ F1.6 (AGC ON), 0Lux IR on
Day/Night	Auto/Color/(B/W)/Timing
WDR	Digital WDR
White Balance	Auto/Manual
BLC /HLC	Support
DNR	2D/3D DNR
Other	Image adjust , Flip
Encode	
Video Standard	H.264/H.265/Mpg
Video Resolution	Main Stream: 20fps @ 8MP (3840x2160), 30fps @ 6MP (3072x2048) / 5MP (2592x1944) / 4MP / 3MP / 1080P / 720P, etc. Sub stream: 720x480/VGA(640x480)/360P/QVGA@30fps,etc.
Video Bitrates	512Kbps - 12Mbps, VBR/CBR
Audio Standard	G.711-u/G.711-a/AAC
Mic	Built-in Microphone and speaker, two way audio
Smart Detection	Smart Human and Vehicle Detection, supports Auto tracking
LED's and light distance	
LED's	6 pcs Array IR LED's + 4pcs soft and warm lighting LEDs
Light Distance	IR distance 70-80 meters, soft and warm lighting distance: 50-60meters

Lens	
Focal length	4.7-94mm
IRIS	F1.6-3.5
View angle	64 - 2.9 °
Zoom	20x optical zoom
Functions	
High power PoE, built in Microphone, SD card slot supports up to 256GB Micro SD card	
PTZ	
Pan/Tilt Range	Pan: 0° ~ 360°; Tilt: -5° ~ 90°
Preset Points	256
Control Speed	Pan: 0.5° ~25° /s; Tilt: 0.5° ~25° /s
A-B Scanning	Supported
Auto Cruising	Supports 8 patrol groups, Max. 16 presets per group
Power on Action	Preset/Scan/Cruise
Cruise tracking	Preset Cruise and Auto tracking can work at the same time
Power-off Recovery	Supported
Network Services	
Protocol	HTTP/RTSP/FTP/SMTP/DHCP/NTP/NFS/RTMP, etc.
P2P	Yes
Web	IE, Firefox, Chrome, Edge, Safari
Media	CMS, Android, IOS
ONVIF	17.06 compatible
General	
Network Port	1-RJ45, 100Mbps, PoE 48V
Power Supply	12 VDC ± 10% 2A (not included)
Power Consumption	< 22 W
Operating Temp.	-30°C-(+60)°C, 10%-90%RH

Ceiling mount (optional)

