



Website :
www.4tifi.com.au





Email :
info@4tifi.com.au

4t0108DLBL2S28EW

8MP Dual-Lens Panoramic, Dual-Light, Two-Way Audio, IP Camera



Dimensions

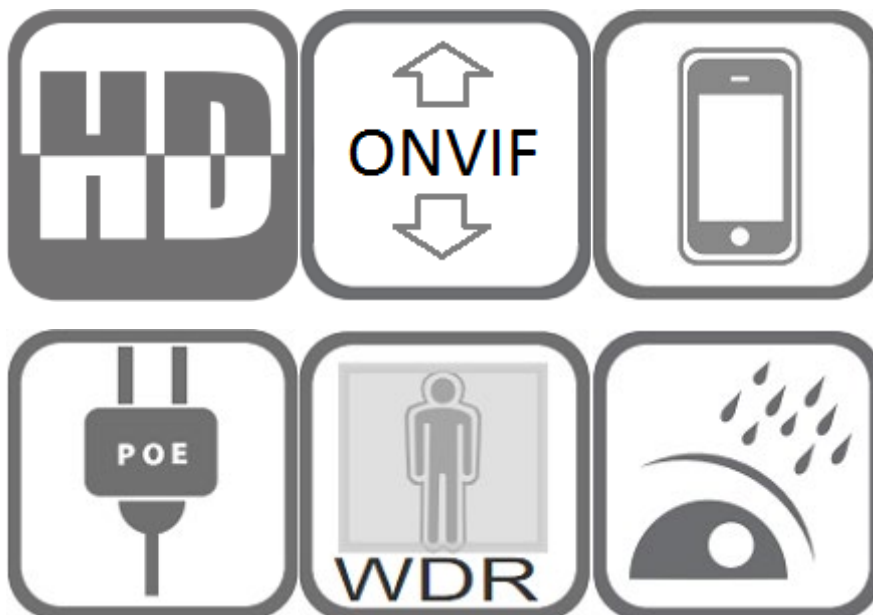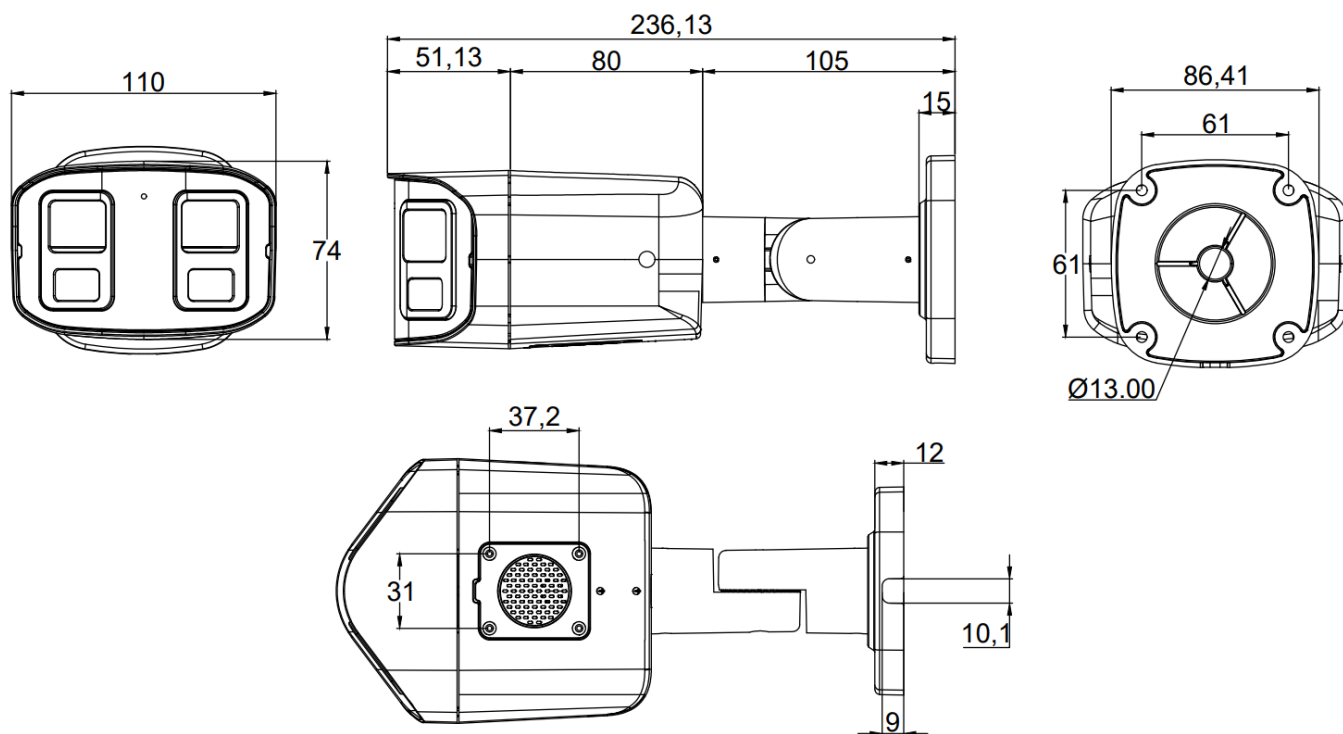



Features

- 1/2.7" CMOS sensor
- 8MP wide-view resolution 4096 x 1944P (19:9)
- 180 °wide-angle
- Low illumination 0.01Lux
- Day/Night, AWB/MWB, BLC, HLC, 2D/3D-DNR, Shutter,
- D-WDR, Mirror, Defogging
- Multiple Style OSD Overlay, Motion Detection, Privacy Mask
- RTSP and ONVIF 17.06 compatible with many third-party NVR's
- H.264/H.265 dual-stream media server
- Easy-to-use P2P Cloud service
- Supports user authentication, video data encryption
- Supports Alarm Snapshot to Email and FTP
- Multiple WEB browsers - IE, Firefox 32bit ESR, Edge, Google Chrome, PC Client, Mobile APP remote access
- RJ45 100mbps network port, IEEE802.3af, PoE
- Lightning protection 4000V
- Strong waterproof housing, IP66
- 2 pcs Warm light + 3 pcs IR Array LED's, IR distance:25-30M, White light distance:25-30M, Three light Modes:
 - Mode 1: Smart Dual Light
 - Mode 2: Pure Infrared Light
 - Mode 3: Pure White Light
- 2 x F1.6 2.8 mm fixed lenses
- Built-in Mic and speaker, two-way audio
- SD card slot, supports UP to 512GB SD card
- With reset button



Technical Specifications:

Model	4t0108DLBL2S28EW
Camera	
Image Sensor	1/2.7" GC5623 CMOS x 2
Effective Pixels	8 megapixels
Electronic Shutter	AUTO, 1/25s ~ 1/1000000s
Min. Illumination	0.01Lux @ F1.6 (AGC ON), 0Lux IR on
Day/Night	Auto/Color/(B/W)/Timing
WDR	Digital WDR
White Balance	Auto/Manual
BLC /HLC	Support
DNR	2D/3D DNR
Other	Human body and Vehicle detection, AGC, Motion Detection, Privacy Mask, Flip, OSD overlay
Encode	
Video Standard	H.264/H.265/H.265+
Video Resolution	MainStream:20fps@4096x1944P Sub stream: 20fps@1024x480
Video Bitrates	512Kbps - 8Mbps, VBR/CBR
Audio Standard	G.711-u/G.711-a/AAC
Built-in Mic	Yes
Built-in Speaker	Yes, Two-way audio
Smart Detection	Human body and Vehicle Detection
LED and distance	
LED	2pcs warm-light LED + 3pcs IR Array LED
IR Distance	20-30 M
White light Distance	20-30 M

Lens	
Focal length	2 x F1.6 2.8 mm fixed lenses
FOV	180°
Other Functions	
SD card slot, supports up to 512GB SD card	
Reset button	
Network Services	
Protocol	HTTP/RTSP/FTP/SMTP/DHCP/NTP/NFS, etc.
P2P	Yes
Web	IE , Firefox, Edge, Google Chrome etc.
Media	CMS, Android, IOS
ONVIF	17.06 compatible
General	
Network Port	1-RJ45, 100Mbps, POE optional
Power Supply	12 VDC ± 10%
Power Consumption	< 10 W
Operating Temp.	-30°C-(+60)°C, 10%-90%RH