



Website :  
[www.4t<sup>fi</sup>.com.au](http://www.4t<sup>fi</sup>.com.au)






Email :  
[info@4t<sup>fi</sup>.com.au](mailto:info@4t<sup>fi</sup>.com.au)

4t01D6DLTM2S28DW

6MP Dual Light VCA AI, IP Turret Camera



## Dimensions

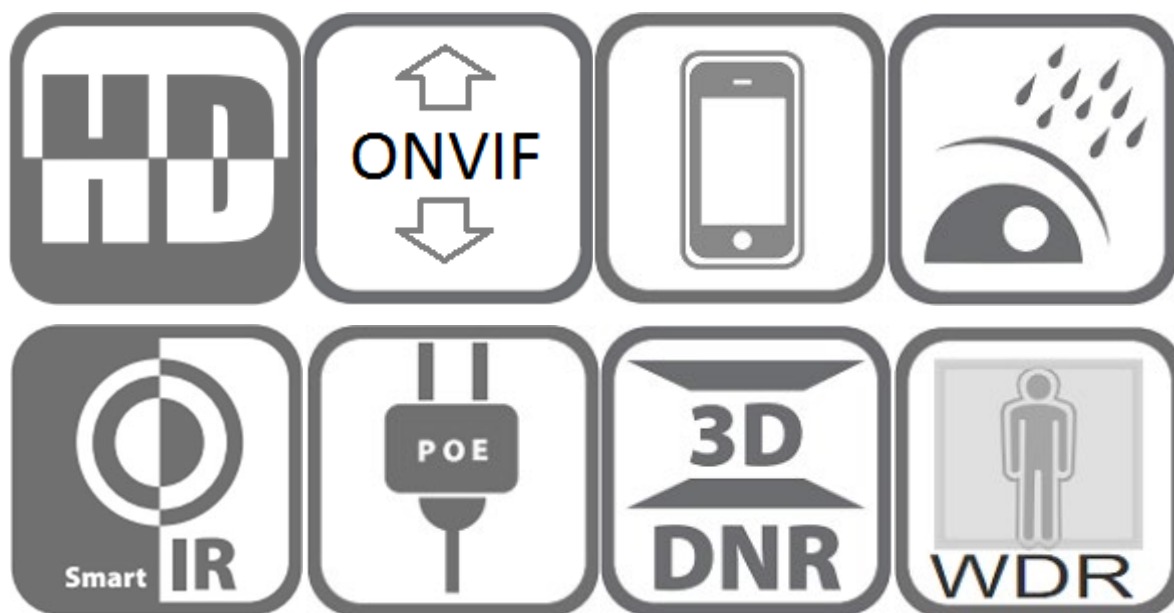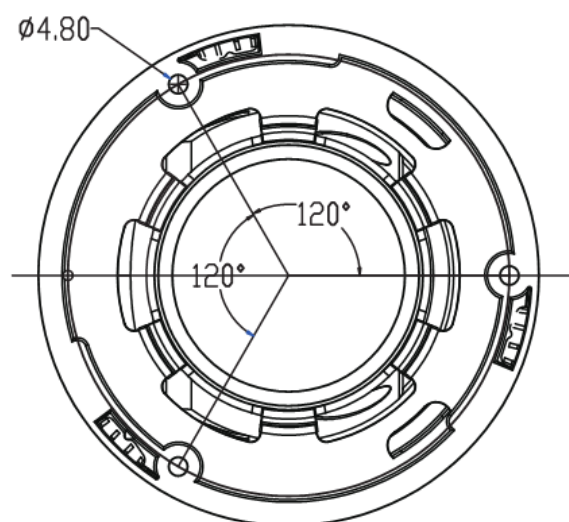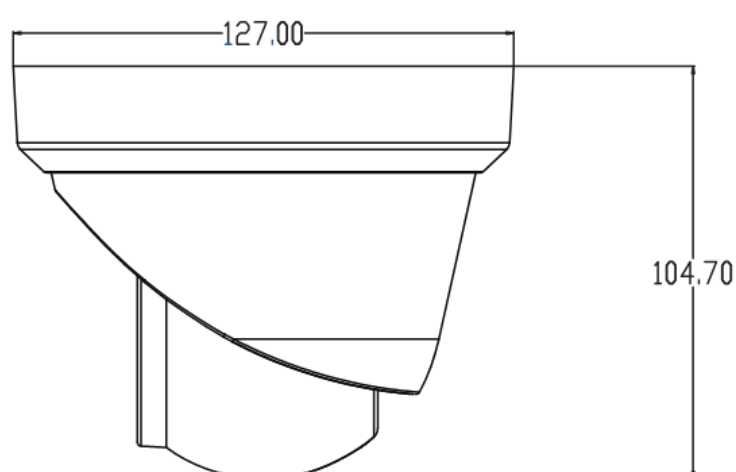



## Features

- 1/3" CMOS sensor
- Full HD 6MP resolution 3072 x 2048P
- Low illumination 0.01Lux
- Day/Night, AWB/MWB, BLC, HLC, 2D/3D-DNR, Shutter, IR-CUT
- D-WDR, Mirror, rotate, Defogging
- Multiple Style OSD Overlay, Motion Detection, Privacy Mask
- RTSP and ONVIF 17.06 compatible with many third-party NVR's
- H.264/H.265 dual-stream media server
- Easy-to-use P2P Cloud service
- Supports user authentication, video data encryption
- Supports Alarm Snapshot to Email and FTP
- Multiple WEB browsers IE, Firefox 32bit ESR, PC Client, Mobile APP remote access
- RJ45 100mbps network port, IEEE802.3af PoE
- Lightning protection 4000V
- Strong water-proof housing, IP67
- 2PCS dual Lights. IR distance: 25-30M, White light distance: 25-30M, Three light Modes:
  - Mode 1: Smart Dual Light
  - Mode 2: Pure Infrared Light
  - Mode 3: Pure White Light
- Reset button and SD card slot
- Smart Intelligent Cross Line, Enter Area, Leave Area, Intrusion and Face Detection



## Specifications

Model	4t01D6DLTM2S28DW
<b>Camera</b>	
Image Sensor	1/3" CMOS
Effective Pixels	3072 (H) × 2048 (V)
Electronic Shutter	AUTO, 1/25s ~ 1/1000000s
Min. Illumination	0.01Lux @ F1.6 (AGC ON), 0 Lux IR on
Day/Night	Auto/Color/(B/W)/Timing
WDR	Digital WDR
White Balance	Auto/Indoor/Outdoor
BLC	Support
DNR	2D/3D DNR
VCA AI functions	Intrusion, Cross Line, Enter Area, Leave Area and Face detection
Other	Human and Vehicle detection, Motion Detection, Privacy Mask, Mirror, Flip
<b>Encode</b>	
Embedded Solution	SSC377D
Video Standard	H.264/H.265
Video Resolution	Main Stream: 25fps@6MP (3072x2048), 5MP (2592x1944), 4MP, 3MP, 1080P, 720P, etc. Sub stream: 720x480/VGA(640x480)/360P/QVGA@30fps,etc.
Video Bitrates	512Kbps - 10Mbps, VBR/CBR
Audio Standard	G.711-u/G.711-a/AAC
OSD Overlay	Title and Time overlay
<b>LED's</b>	
LED's	2PCs dual Lights
Light Distance	25-30 M
<b>Lens</b>	
Focal length	HD 2.8mm F1.6
<b>Functions</b>	
Two way audio, Built in Microphone and Speaker ,with SD card slot (supports up to 512GB SD card)	

Network Services	
Protocol	HTTP/RTSP/FTP/NFS/SMTP/DHCP/NTP, etc.
P2P	Yes
Web	IE , Firefox, Edge, Google Chrome etc.
Media	CMS, Android, IOS
ONVIF	17.06 compatible
General	
Network Port	1-RJ45, 100Mbps
Power Supply	POE ,12 VDC $\pm$ 10%
Power Consumption	< 8 W
Operating Temp.	-30°C-(+60)°C, 10%-90%RH