



Website :
www.4t^{fi}.com.au





Email :
info@4t^{fi}.com.au

4t01D6DLBM2S28DW

6MP Dual Light VCA AI, IP Bullet Camera



Dimensions

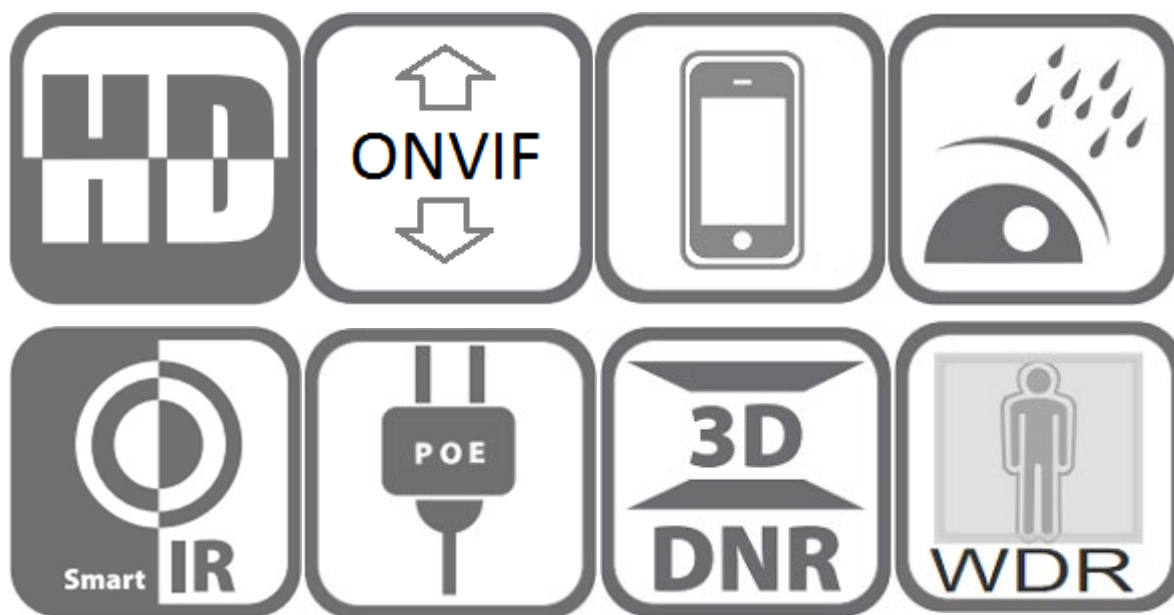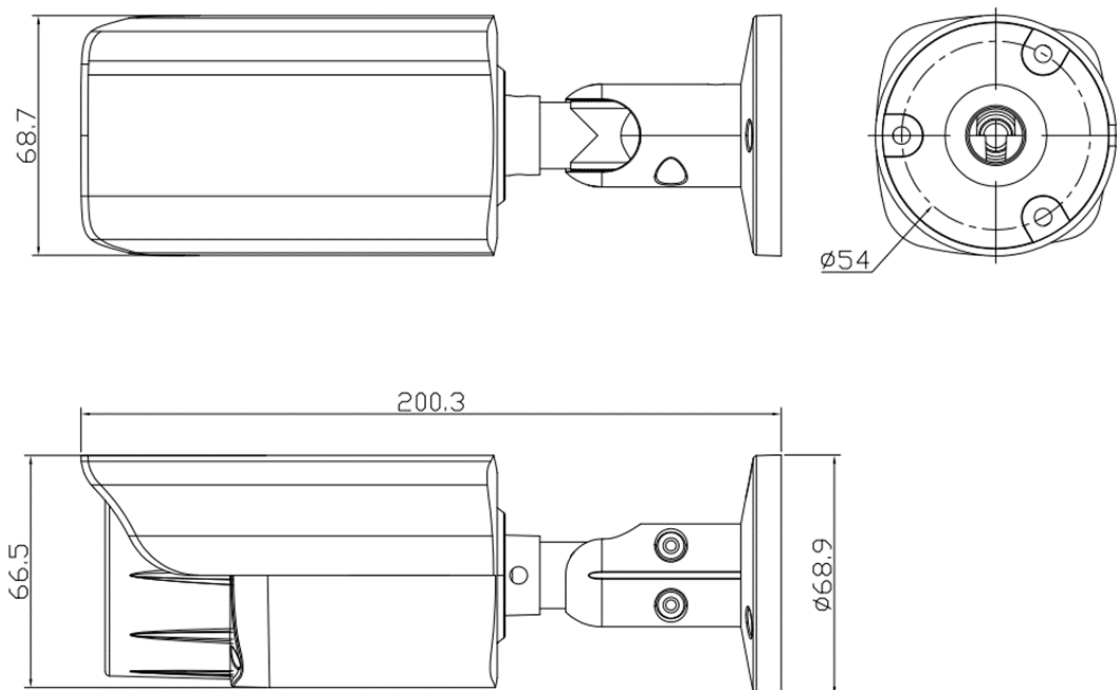



Features

- 1/3" CMOS sensor
- Full HD 6MP resolution 3072 x 2048P
- Low illumination 0.01Lux
- Day/Night, AWB/MWB, BLC, HLC, 2D/3D-DNR, Shutter, IR-CUT
- D-WDR, Mirror, rotate, Defogging
- Multiple Style OSD Overlay, Motion Detection, Privacy Mask
- RTSP and ONVIF 17.06 compatible with many third-party NVR's
- H.264/H.265 dual-stream media server
- Easy-to-use P2P Cloud service
- Supports user authentication, video data encryption
- Supports Alarm Snapshot to Email and FTP
- Multiple WEB browsers IE, Firefox 32bit ESR, PC Client, Mobile APP remote access
- RJ45 100mbps network port, IEEE802.3af PoE
- Lightning protection 4000V
- Strong water-proof housing, IP67
- 2PCS dual Lights. IR distance: 25-30M, White light distance: 25-30M, Three light Modes:
 - Mode 1: Smart Dual Light
 - Mode 2: Pure Infrared Light
 - Mode 3: Pure White Light
- Reset button and SD card slot
- Smart Intelligent Cross Line, Enter Area, Leave Area, Intrusion and Face Detection



Specifications

Model	4t01D6DLBM2S28DW
Camera	
Image Sensor	1/3" CMOS
Effective Pixels	3072 (H) × 2048 (V)
Electronic Shutter	AUTO, 1/25s ~ 1/1000000s
Min. Illumination	0.01Lux @ F1.6 (AGC ON), 0 Lux IR on
Day/Night	Auto/Color/(B/W)/Timing
WDR	Digital WDR
White Balance	Auto/Indoor/Outdoor
BLC	Supported
DNR	2D/3D DNR
VCA AI functions	Intrusion, Cross Line, Enter Area, Leave Area and Face detection
Other	Human and Vehicle detection, Motion Detection, Privacy Mask, Mirror, Flip
Encode	
Embedded Solution	SSC377D
Video Standard	H.264/H.265
Video Resolution	Main Stream: 25fps@6MP (3072x2048), 5MP (2592x1944), 4MP, 3MP, 1080P, 720P, etc. Sub stream: 720x480/VGA(640x480)/360P/QVGA@30fps,etc.
Video Bitrates	512Kbps - 10Mbps, VBR/CBR
Audio Standard	G.711-u/G.711-a/AAC
OSD Overlay	Title and Time overlay
LED's	
LED's	2PCs dual Lights
Light Distance	25-30 M
Lens	
Focal length	HD 2.8mm F1.6
Functions	
Two way audio, Built in Microphone and Speaker, with SD card slot (supports up to 512GB SD card)	

Network Services	
Protocol	HTTP/RTSP/FTP/NFS/SMTP/DHCP/NTP, etc.
P2P	Yes
Web	IE , Firefox, Edge, Google Chrome etc.
Media	CMS, Android, IOS
ONVIF	17.06 compatible
General	
Network Port	1-RJ45, 100Mbps
Power Supply	POE ,12 VDC $\pm$ 10%
Power Consumption	< 8 W
Operating Temp.	-30°C-(+60)°C, 10%-90%RH