



Website :
www.4t^{fi}.com.au






Email :
info@4t^{fi}.com.au

4t01E6FCTM2S28EW

6MP Colour View, Turret IP camera



Dimensions

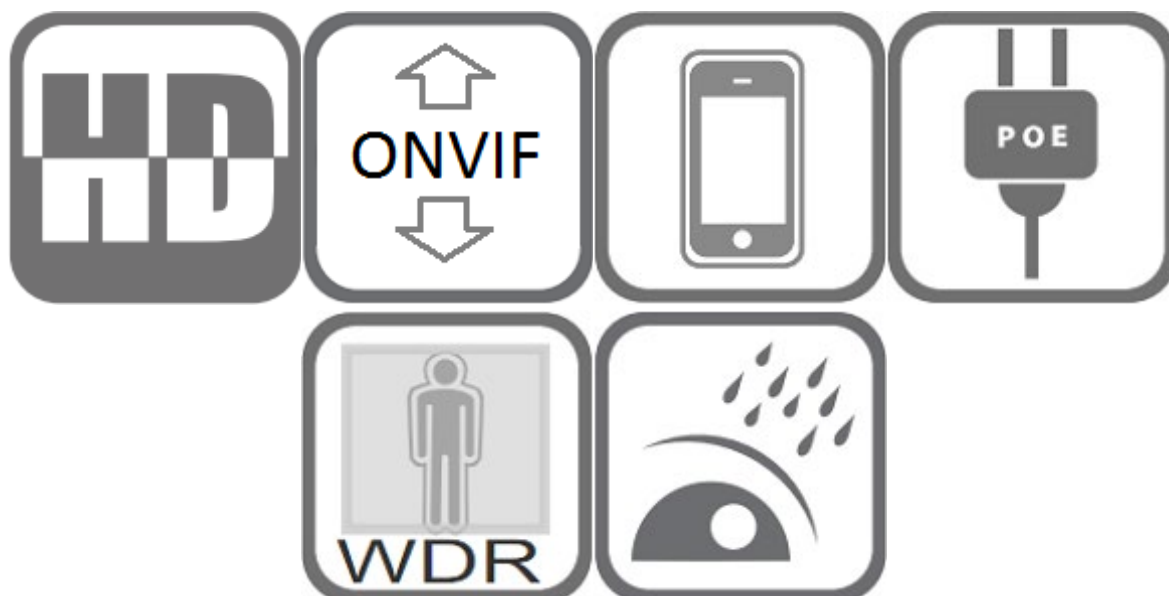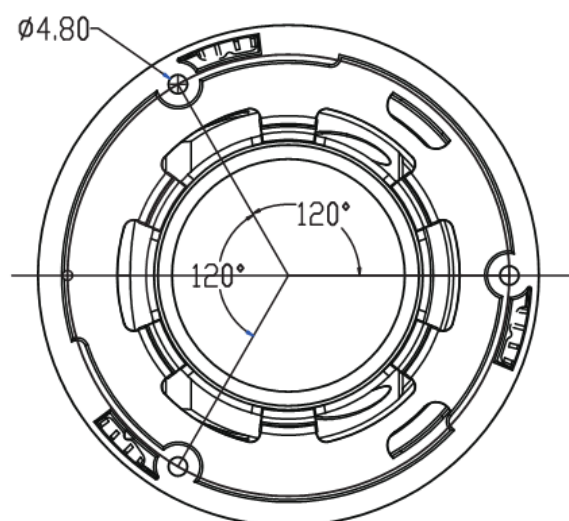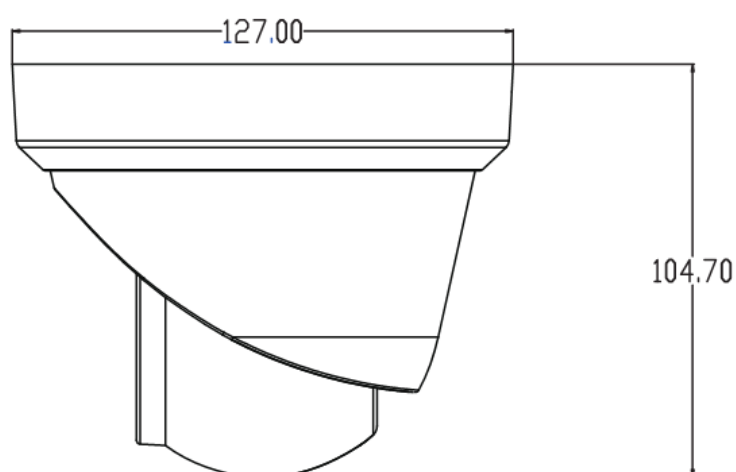



Features

- 1/2.8" Sony CMOS sensor
- FHD resolution 3072x 2048P
- Low illumination 0.01Lux
- Day/Night, AWB/MWB,BLC, HLC, 2D/3D-DNR
- D-WDR, Mirror, rotate, Defogging
- Multiple Style OSD Overlay, Motion Detection, Privacy Mask
- RTSP and ONVIF 17.06 compatible with many third-party NVR's
- H.264/H.265 dual-stream media server
- Easy-to-use P2P Cloud service
- Supports user authentication, video data encryption
- Supports Alarm Snapshot to Email and FTP
- Multiple WEB browsers - IE, Firefox 32bit ESR, Edge, Google Chrome, PC Client, Mobile APP remote access
- Two way audio, Built in Microphone and Speaker
- SD card slot (supports up to 512GB micro SD card), with reset button
- RJ45 100mbps network port, IEEE802.3af, PoE
- Lightning protection 4000V
- Strong waterproof housing, IP67
- 2PC Soft & Warm Supplemental Light LED, Light distance:20-30M
- HD 2.8mm F1.0 true star light lens



Technical Specifications:

Model	4t01E6FCTM2S28EW
Camera	
Image Sensor	1/2.8" Sony CMOS
Effective Pixels	6 megapixels (3072*2048)
Electronic Shutter	AUTO, 1/25s ~ 1/1000000s
Min. Illumination	0.01Lux @ F1.0 (AGC ON)
Day/Night	Auto/Color/(B/W)/Timing
WDR	Digital WDR
White Balance	Auto/Manual
BLC /HLC	Supported
DNR	2D/3D DNR
Other	Human body and Vehicle detection, AGC, Motion Detection, Privacy Mask, Flip, Rotate, ROI, OSD overlay
Encode	
Video Standard	H.264/H.265
Video Resolution	Main Stream: 25fps@6MP (3072x2048)/ 5MP (2592x1944)/4MP/3MP/1080P/720P, etc. Sub stream: 720x480/VGA(640x480)/360P/QVGA@25fps,etc.
Video Bitrates	512Kbps - 8Mbps, VBR/CBR
Audio Standard	G.711-u/G.711-a/AAC
Audio	Two-way audio, Built in Microphone and Speaker
OSD Overlay	Title and Time overlay, custom color adjustable
LED's and light distance	
LED	2PC Soft & Warm Supplemental Light LED
Light Distance	20-30 M

Lens	
Focal length	HD 2.8mm F1.0 true star light lens
Other Function	
SD card slot (supports up to 512GB micro SD card), with reset button	
Network Services	
Protocol	HTTP/RTSP/FTP/SMTP/DHCP/NTP, etc.
P2P	Yes
Web	IE , Firefox, Edge, Google Chrome etc.
Media	CMS, Android, IOS
ONVIF	17.06 compatible
General	
Network Port	1-RJ45, 100Mbps, POE
Power Supply	12 VDC $\pm$ 10%, POE
Power Consumption	< 8 W
Operating Temp.	-30°C-(+60)°C, 10%-90%RH